



### Applications include:

Research & Development	Structural Monitoring	Vehicle Testing
Agricultural Research	Strain Gauges	GPS
Weather Stations	Process Monitoring	CANgate (optional)
Total Energy Monitoring	Fault Identification	– CAN bus
Environmental Monitoring	Machine Down Time	– J1939
Temperature Profiling	Pressure	– OBDII
Thermistor Arrays	Load Cells	
Aquaculture	Flow	

**\*FREE Software & Technical Support**

- » Dual Channel Isolation Technology
- » 2 Serial 'Smart Sensor' ports
- » FTP for automatic data transfer
- » Up to 15 Analog ( $\pm 30V$ ) sensor inputs
- » Expandable to 300 analog inputs
- » Modbus for SCADA connection
- » SDI-12 (multiple networks)
- » USB memory for easy data and program transfer

**Warranty:** All dataTaker Data Loggers are covered by a 3 year warranty on workmanship and parts. For further information on the dataTaker range, or for useful downloads, visit the dataTaker web site at [www.datataker.com](http://www.datataker.com) or contact your nearest dataTaker office or distributor.

**Quality Statement:** dataTaker operates a Quality Management System complying with ISO9001:2008. It is dataTaker's policy to supply customers with products which are fit for their intended purpose, safe in use, perform reliably to published specification and are backed by a fast and efficient customer support service.

**Trademarks:** dataTaker is a registered trademark.

**Specifications:** dataTaker reserves the right to change product specifications at any time without notice. **Designed and Manufactured in Australia.**

\*Our ability to provide free software and support is dependent on applicable export control laws (including those of the United States) and the export policy from time to time of Thermo Fisher Scientific Inc.

### The Smarter Solution

The dataTaker DT80 smart data logger provides an extensive array of features that allow it to be used across a wide variety of applications. The DT80 is a robust, stand alone, low power data logger featuring USB memory stick support, 18 bit resolution, extensive communications capabilities and built-in display. The dataTaker DT80's Dual Channel concept allows up to 10 isolated or 15 common referenced analog inputs to be used in many combinations. With support for multiple SDI-12 sensor networks, Modbus for SCADA systems, FTP and Web interface, 12V regulated output to power sensors, the DT80 is a totally self contained solution.

### Versatile Measurement

Connect an array of sensors through the versatile Analog and digital channels, high-speed counter inputs, phase encoder inputs, programmable serial sensor channels and the optional CANgate interface available for CAN bus applications. Temperature, voltage, current, 4-20mA loops, resistance, bridges, strain gauges, frequency, digital, serial and calculated measurements can all be scaled, logged and returned in engineering units or within statistical reporting. Set up sampling, logging, alarm and control tasks to suit your own requirements while interfaces for smart sensors, GPS and other intelligent devices expand the DT80 flexibility.

### Superior Data Storage & Communications

With the standard unit able to store up to 10 million data points (expandable) you can log as much or as little as you need. Overwrite or stop logging once allocated memory is full, archive data on alarm event, copy to USB memory or transfer via FTP, the choice is yours. Communications features include RS232, USB and Ethernet, connect to the DT80 locally, remotely through a modem or over the Internet. The web interface allows users to configure the DT80, access logged data and see current measurements as mimics or in a list using a web browser. FTP provides data to your office over the internet or mobile phone network, without the need for polling or specific host software.

[www.datataker.com](http://www.datataker.com)

- » Built-in software - no application to install
- » Runs directly from your web browser
- » Accessible by Ethernet or USB<sup>1</sup> connection
- » Intuitive graphical interface
- » Easy-to-use configuration editor
- » Access live and historical data
- » View data as charts, mimics and tables


## What is dEX?

dEX is an intuitive graphical interface that allows you to configure your data logger, view real-time data in mimics, trend charts or tables and retrieve your historical data for analysis.

dEX runs directly from your web browser and can be accessed either locally or remotely, anywhere that a TCP/IP connection is available including worldwide over the Internet. You can use any of the logger's built-in communications ports to view dEX including Ethernet, USB<sup>1</sup> and RS-232.


## Easy configuration

The dEX configuration editor allows you to view, edit and save logger configurations in an easy-to-use Windows Explorer style user interface.

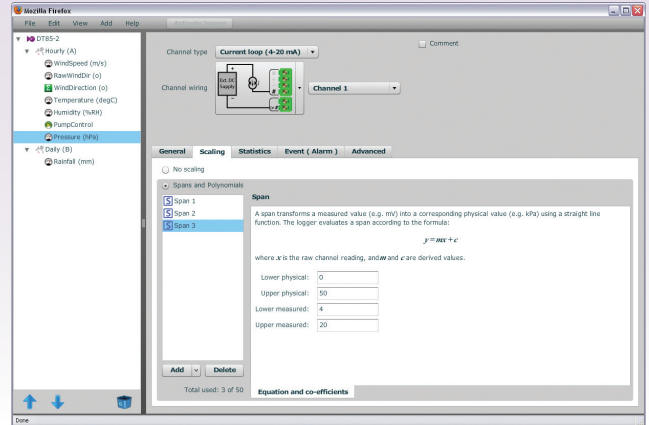


## Real-time monitoring

dEX displays real-time sensor measurements, calculations and diagnostic information using mimics, tables and trend charts.

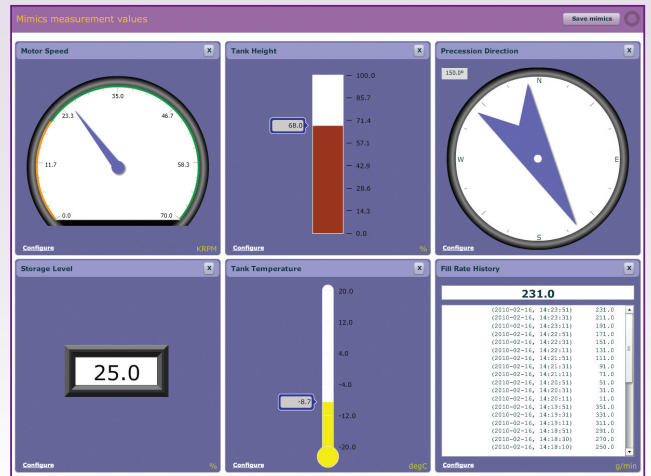

## Data retrieval

dEX allows you to retrieve your data at the click of a mouse button. Just select either All, Range or New Data Only.

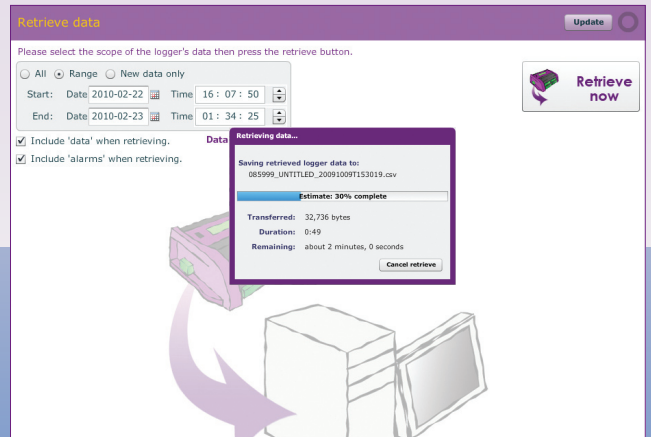

### Browser-based solution

dEX comes pre-installed on every logger in the DT80 range<sup>2</sup>. The software loads in your web browser so there is no need to install cumbersome applications on your computer. Being browser-based, dEX is cross-platform and will work on all major operating systems including Windows, Mac and Linux. To simplify it even further, dEX starts automatically in your default web browser when you connect to your logger using a USB cable<sup>1</sup>.

### Data that is compatible with your applications

Logged data is ready to import into common spreadsheet and data processing applications such as Excel for further analysis and reporting. Data can be saved to your computer in comma separated (.CSV) format or our proprietary binary (.DBD) format.


### Command window

The command window provides a terminal interface which allows the built-in command language of the logger to be used. Macro buttons allow common commands to be sent on a button press.

### Configuration editor

The configuration editor allows you to view, edit and save logger configurations in an easy-to-use Windows Explorer style user interface. Tree view of configuration allows definition of measurement schedules and measurements.

Wiring diagrams show available wiring configurations for each sensor type. Configuration can be stored and retrieved on either the logger or a local computer.

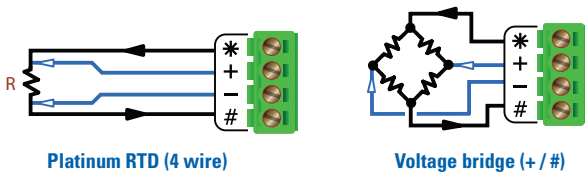

### Channel list

Displays name, value, units, alarm state, time stamp and logging state for each measurement.

Run	Name	Value	Units	Alarm	Time stamp	Log
✓	1hr_Humidity	51	%RH		2010-02-02, 12:00:00	✓
✓	1hr_Mean Win	0	m/s		2010-02-02, 12:00:00	✓
✓	1hr_Mean Win	7			2010-02-02, 12:00:00	✓
✓	1hr_Pressure	1006	hPa		2010-02-02, 12:00:00	✓
✓	1hr_Temperatur	23.6	Deg C		2010-02-02, 12:00:00	✓
✓	1min_Humidit	48	%RH		2010-02-02, 12:32:00	✓
✓	1min_Mean Wi	0	m/s		2010-02-02, 12:32:00	✓

### Customisation of the application

The menu options, mimics panels and mimics can be added or removed to suit novice or advanced users. The color and brand name images within dEX can be customised to match corporate requirements or for personal preference.


Mimics are organised into panels which can be modified to highlight custom alarm conditions or data grouping. Mimics include dials, bar graphs, thermometers etc. Real-time chart recorder mimic allows you to view trends and historical data over a custom time/date range. Up to 16 mimics can be displayed on up to 5 mimic pages (default is 1 page of 6 mimics).

### Minimum system requirements

- Web Browser (tested with): Internet Explorer V7 and above, Firefox, Safari & Google Chrome
- TCP/IP connection
- Adobe flash player 10 or higher
- Screen resolution of 1024 x 768

### Chart recorder mimic

Real-time trending for sensors, calculations or other data. Supports up-to 5 traces per chart and up-to 2 Y-axes. Backfills with historical data stored in logger.

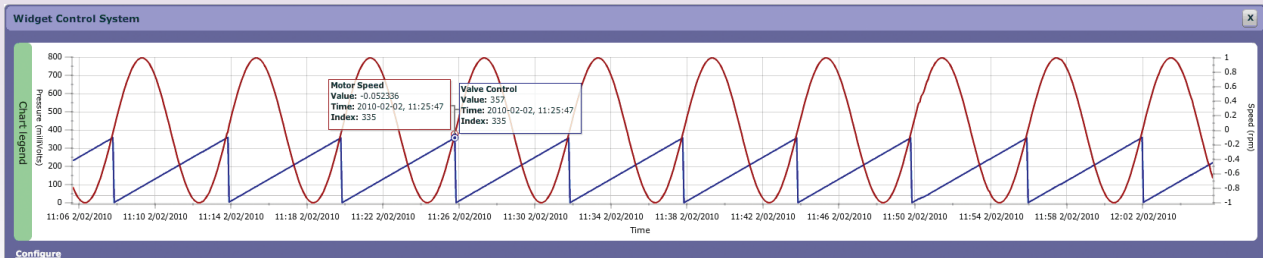

1. USB port equipped models only.  
 2. dEX operates on all DT80 range Series 2 & Series 3 models (DT80, DT81, DT82E, DT85, DT80G, DT85G). The latest firmware which includes dEX is available for download from the dataTaker website. DT80 range Series 1 models do not support dEX.

*The difference is dEX!*

**Analog Channels**

5 analog input channels (expandable to 100\*)  
 Each channel is independent and supports: one isolated 3-wire or 4-wire input, or two isolated 2-wire inputs, or three common referenced 2-wire inputs.  
 The following maximums apply.  
 Two wire with common reference terminal:  
 15 (expandable to 300\*)  
 Two wire isolated: 10 (expandable to 200\*)  
 Three and four wire isolated: 5 (expandable to 100\*)  
 \*Expansion requires optional CEM20

**Fundamental Input Ranges**

The fundamental inputs that the DT80 can measure are voltage, current, resistance and frequency. All other measurements are derived from these.

Full Scale	Resolution	Full Scale	Resolution
±30 mVdc	0.25 µV	100 Ω	1.5 mΩ
±300 mVdc	2.5 µV	1000 Ω	15 mΩ
±3 Vdc	25 µV	10,000 Ω	150.00 mΩ
±30 Vdc	250 µV	100 Hz	0.0002 %
±0.3 mA	2.5 nA	10 kHz	0.0002 %
±3 mA	25 nA		
±30 mA	250 nA		

Auto-ranging is supported over 3 ranges.

**Accuracy**

Measurement at ...	5°C to 40°C	-45°C to 70°C
DC Voltage	0.1%	0.35%
DC Current	0.15%	0.45%
DC Resistance	0.1%	0.35%
Frequency	0.1%	0.25%

Accuracy table above is % of reading ±0.01% of full scale.

**Sampling**

Integrates over 50/60Hz line period for accuracy and noise rejection  
 Maximum sample speed: 25Hz  
 Effective resolution: 18 bits  
 Linearity: 0.01 %  
 Common mode rejection: >90dB  
 Line series mode rejection: >35dB

**Inputs**

Inter-Channel Isolation: 100V (relay switching)  
 Analog Section Isolation: 100V (opto-isolated)  
 Input impedance: 100KΩ, >100MΩ  
 Common mode range: ±3.5V or ±35V on 30V range

**Sensor Excitation (Supply)**

Analog channels: selectable 250µA or 2.5mA precision current source, 4.5V voltage source, or switched external supply  
 General Purpose: Switchable 12V regulated supply for powering sensors & accessories (max 150mA)  
 Switchable 5V regulated supply for powering analog sensors (max 25mA)

**Analog Sensors**

Supports a wide range of sensors including, but not limited to, those listed below. A wide range of sensor scaling and linearising facilities including polynomials, expressions and functions.

**Thermocouples**

Types: B, C, D, E, G, J, K, N, R, S, T  
 Calibration standard: ITS-90

**RTDs**

Materials supported: Pt, Ni, Cu  
 Resistance range: 10Ω to 10KΩ

**Thermistors**

Types: YSI 400xx Series, other types\*  
 Resistance range: <10kΩ\*\*

\* Other thermistor types are supported by thermistor scaling and calculated channels.

\*\*Resistance range can be increased with the use of a parallel resistor.

**Monolithic Temperature Sensors**

Types supported: LM34 - 60, AD590, 592, TMPxx, LM135, 235, 335

**Strain Gauge and Bridge Sensors**

Configurations: ¼, ½ & full bridge  
 Excitation: voltage or current

**4-20mA Current Loop**

Internal 100Ω shunt or external shunt resistor

**Digital Channels**

**Digital Input/Outputs**

8 bi-directional channels  
 Input Type: 8 logic level (max 20/30V)  
 Output Type: 4 with open drain FET(max: 30V, 100mA), 4 with logic output.

**Relay Output**

1 latching relay, contacts (max: 30Vdc, 1A)

**Counter Channels**

**Low Speed Counters**

8 counters shared with digital inputs.  
 Low speed counters do not function in sleep mode.  
 Size: 32 bit Max Count rate: 10 Hz

**Dedicated Counter Inputs**

4 high speed or 2 phase encoder (quadrature) inputs  
 Size: 32 bit Max Count rate: 100 kHz  
 Input type: 2 logic level inputs (max ±30V), 2 sensitive inputs (10mV) for magnetic pick-ups (max ±10V)

**Serial Channels**

**SDI-12**

4 SDI-12 inputs, shared with digital channels. Each input can support multiple SDI-12 sensors.

**Generic Serial Sensor**

Flexible options to allow data to be logged from a wide range of smart sensors and data streams.  
 Available ports: Serial Sensor Port (RS232, RS422, RS485) or Host RS232 Port\*  
 Baud rate: 300 to 115,200

\*If used as a Serial Sensor channel then the Host Port is not available for other communications.

**Calculated Channels**

Combine values from analog, digital and serial sensors using expressions involving variables and functions.  
 Functions: An extensive range of Arithmetic, Trigonometric, Relational, Logical and Statistical functions are available.

**Alarms**

Condition: high, low, within range and outside range  
 Delay: optional time period for alarm response  
 Actions: set digital outputs, transmit message, execute any dataTaker command.

**Scheduling of Data Acquisition**

Number of schedules: 11  
 Schedule rates: 10ms to days

**Data Storage**

**Internal Store**

Capacity: 128MB = approx 10,000,000 data points  
 Larger storage available refer to technical support.

**Removable USB store device (optional accessory)**

Types: compatible with USB 1.1 or USB 2.0 drives, e.g. Flash drive.  
 Capacity: approx. 90,000 data points per megabyte.

**Communication Interfaces**

**Ethernet Port**

Interface: 10BaseT (10Mbps)  
 Protocol: TCP/IP, Modbus (Master & Slave)

**USB Port**

Interface: USB 1.1 (virtual COM port)  
 Protocol: ASCII command

**Host RS232 Port**

Speed: 300 to 115,200 baud (57,600 default)  
 Flow Control: Hardware (RTS/CTS), Software (XON/XOFF), None  
 Handshake lines: DCD, DSR, DTR, RTS, CTS  
 Modem support: auto-answer and dial out  
 Protocols: ASCII Command, TCP/IP (PPP), Modbus (Master & Slave), Serial Sensor

**Serial Sensor Port**

Interface: RS232, RS422m, RS485  
 Speed: 300 to 57,600 baud  
 Flow Control: Hardware (RTS/CTS), Software (XON/XOFF), None  
 Protocols: Modbus (Master & Slave), Serial Sensor

**Network (TCP/IP) Services**

Uses Ethernet and/or Host RS232 (PPP) ports

**Command Interface**

Access the ASCII command interface of the DT80 via TCP/IP

**Web Server**

Access current data and status from any web browser. Custom pages can be defined. Download data in CSV format. Command interface window. Define mimic displays.

**Modbus Server (slave)**

Access current data and status from any Modbus client (e.g. SCADA system)

**Modbus Client (master)**

Read/write data from modbus sensors and devices including PLC's, dataTaker loggers, modbus displays etc.

**FTP Server**

Access logged data from any FTP client or web browser

**FTP Client**

Automatically upload logged data direct to an FTP server

**System**

**Display and Keypad**

Type: LCD, 2 line by 16 characters, backlight.  
 Display Functions: channel data, alarms, system status.  
 Keypad: 6 keys for scrolling and function execution.  
 Status LEDs: 4 for sample, disk, attention and power.

**Firmware Upgrade**

Via: RS232, Ethernet, USB or USB disk.

**Real Time Clock**

Normal resolution: 200µs  
 Accuracy: ±1 min/year (0°C to 40°C), ±4 min/year (-40°C to 70°C)

**Power Supply**

External voltage range: 10 to 30Vdc  
 Internal battery: 6Vdc 1.2Ahr lead acid  
 Peak Power: 12W (12Vdc 1A)

**Average power Consumption**

Using 12Vdc external power source

Sampling Speed	Average Power
1 second	1350 mW
5 second	500 mW
30 second	135 mW
5 minutes	70 mW
1 hour	60 mW

**Typical Operating Time**

From internal 6Vdc, 1.2Ahr battery

Sampling Speed	Operating Time
1 second	6.5 hours
5 second	1 day
1 minute	10 days
1 hour	3.5 months

**Physical and Environment**

Construction: Powder coated zinc and anodized aluminum.  
 Dimensions: 180 x 137 x 65mm  
 Weight: 1.5kg (4kg shipping)  
 Temperature range: -40°C to 70°C\*  
 Humidity: 85% RH, non-condensing

\*reduced battery life and LCD operation outside range -15°C to 50°C

**Accessories Included**

Resource CD: includes software, video training and user manual.  
 Comms cable: USB cable  
 Line adaptor: 110/240Vac to 15Vdc, 800mA

**For full technical specifications download the user's manual from our website [www.datataker.com](http://www.datataker.com).**

Your local distributor